

***RoHS Compliant***  
**SATA Flash Drive Series**  
***Datasheet for SFD 25D***

**January 3, 2020**

**Revision 1.1**

***This Specification Describes the Features and  
Capabilities of the Standard and Industrial  
Temperature  
SATA Flash Drives***

***Please Contact Fortasa Memory Systems Sales for  
any Custom Features Required For Your Specific  
Application***



1670 So. Amphlett Blvd  
Suite 214-33  
San Mateo, CA 94402 USA  
888-367-8588  
[www.fortasa.com](http://www.fortasa.com)

# SATA Flash Drive – 2.5”

## FMS-SFD25DXxxxG-XAT



### Features:

- **Standard Serial SATA 3.2**
  - SATA 3.1 command set compatible
  - Serial SATA 6.0 Gbps Interface
  - Backward compatible with SATA 1.5 and 3.0 Gbps interfaces
  - ATA-8 compatible command set
- **Low power consumption (typical)**
  - Supply voltage: 5V±5%
  - Active mode: 475 mA
  - Idle mode: 75 mA
- **Capacity**
  - 8, 16, 32, 64, 128, 240 GB
- **NAND flash type: SLC**
- **MTBF (hours):** >2,000,000
- **Connector Type**
  - 7-pin signal connector
  - 15-pin power connector
- **Performance**
  - Burst transfer rate: 600 MB/sec
  - Sustained read: up to 530 MB/sec
  - Sustained write: up to 445 MB/sec
  - Random read (4K): up to 82,000 IOPS
  - Random write (4K): up to 76,000 IOPS
- **Form factor**
  - 2.5 inch
    - 7.0mm - 100.00 x 69.85 x 6.90, unit: mm
    - 9.5mm - 100.00 x 69.84 x 9.30, unit: mm
- **RoHS compliant**
- **Shock and Vibration**
  - Shock: 1500g (approx.)
  - Vibration: 15g (approx.)
- **Thermal Sensor for Temperature Management**
- **Intelligent endurance design**
  - Built-in hardware ECC, enabling up to 40 bits error in 1K Byte block
  - Global wear-leveling scheme together with dynamical block allocation to significantly increase the lifetime of a flash device and optimize the disk performance
  - Flash bad-block management
  - *Power Failure Management*
  - *ATA Secure Erase*
  - *SMART Command*
  - *Trim Command*
- **Temperature ranges**
  - Operation:
    - Standard: 0°C to 70°C (32° ~ 158°F)
    - Industrial: -40°C to 85°C (-40° ~ 185°F)
  - Storage: -40°C to 100°C (-40° ~ 212°F)
- **Endurance in Terabytes Written (TBW)**
  - 8 GB: 339 TBW
  - 16 GB: 612 TBW
  - 32 GB: 1,348 TBW
  - 64 GB: 2,819 TBW
  - 128 GB: 6,000 TBW
  - 240 GB: 12,222 TBW

---

## Table of Contents

1 Product Description .....	5
1.1 General Description.....	5
1.2 Functional Block .....	5
1.3 Capacity Specification.....	5
1.4 Performance Specification .....	6
1.5 Pin Assignments.....	6
2. Software Interface .....	8
2.1 Command Set.....	8
3. Flash Management .....	9
3.1 Error Correction/Detection.....	9
3.2 Wear Leveling .....	9
3.3 Power Failure Management.....	9
3.4 ATA Secure Erase .....	9
3.5 S.M.A.R.T. Technology .....	10
3.6 TRIM Command Support.....	11
4. Environmental Specifications .....	11
4.1 Environments .....	11
4.2 Mean Time Between Failures (MTBF) .....	11
4.3 Certification and Compliance.....	11
4.4 Endurance.....	12
5. Electrical Specification .....	12
5.1 Operating Voltage .....	12
5.2 Power Consumption .....	12
6. Physical Characteristics .....	13
6.1 7.0 mm Dimensions.....	13
6.2 9.5 mm Dimensions.....	14
7. Product Ordering Information.....	15
7.1 Product Code Designations .....	15
7.2 Valid Combinations.....	16
7.2.1 7.0mm Housing .....	16
7.2.2 9.50mm Housing .....	16
7.2.3 Additional Features (Optional).....	16

**SATA Flash Drive – 2.5”**  
**FMS-SFD25DXxxxG-XAT**



---

8. Revision History ..... 17

## 1 Product Description

### 1.1 General Description

Fortasa’s SFD25D is a high-performance, SATA interface, solid state drive (SSD) designed to replace a conventional SATA hard disk drive. SFD supports standard SATA protocol and can be plugged into a standard SATA connector commonly found in rugged laptops, military devices, thin clients, Point of Sale (POS) terminals, telecom, medical instruments, surveillance systems and industrial PCs. Fortasa SFD Series is the best drop-in replacement for high-maintenance HDD where reliability is of a major importance.

The SFD25D drive offers capacities of up to 240 gigabytes, providing full support for the SATA 6GBps high-speed interface standard. It can operate at sustained access rates of up to 520 megabytes per second, which is much faster than other solid-state or traditional HDD SATA drives currently available on the market.

SFD25D offers high reliability global data wear-leveling scheme to allow uniform use of all storage blocks, increasing the lifetime of Flash media and optimizing drive performance. The SFD25D also offers Self-Monitoring Analysis and Reporting Technology (S.M.A.R.T.) feature that follows the ATA/ATAPI specifications and uses the standard SMART command B0h to read data from the drive. This capability monitors the drive accesses and provides the host with vital information about drive condition to schedule maintenance and service times.

### 1.2 Functional Block

The SFD25D drive includes a SATA 6.0 Gps Flash Controller and flash media. The Flash controller integrates the flash management unit to support multi-channel, multi-bank flash arrays.

### 1.3 Capacity Specification

Standard capacity specification of the SATA Flash Drive product is shown in Table 1-1. The table lists the specific capacity and the default numbers of heads, sectors and cylinders (CHS) for each product line.

**Table 1-1: Capacity specifications**

Capacity	Total Bytes	Cylinders	Heads	Sectors	Max LBA
8GB	8,012,390,400	15525 <sup>1</sup>	16	63	15,649,200
16GB	16,013,942,784	16383 <sup>1</sup>	16	63	31,277,232
32GB	32,017,047,552	16383 <sup>1</sup>	16	63	62,533,296
64GB	64,023,257,088	16383 <sup>1</sup>	16	63	125,045,424
128GB	128,035,676,160	16383 <sup>1</sup>	16	63	250,069,680
240GB	256,060,514,304	16383 <sup>1</sup>	16	63	500,118,192

1. Cylinders, heads or sectors are not applicable for these capacities. Only LBA addressing applies.

*Please contact factory for any non-listed SATA Flash Drive capacity or custom CHS requirement.*

# SATA Flash Drive – 2.5” FMS-SFD25DXxxxG-XAT



## 1.4 Performance Specification

Performances of the SATA Flash Drive are listed in Table 1-2.


**Table 1-2:** High Performance specifications

Performance \ Capacity	8GB	16GB	32GB	64GB	128GB	240GB
<b>Sustained read (MB/s)</b>	136	135	530	530	530	320
<b>Sustained write (MB/s)</b>	105	115	270	440	445	440
<b>Random Read IOPS (4K)</b>	25,000	26,000	81,000	82,000	82,000	51,000
<b>Random Write IOPS (4K)</b>	6,000	17,000	62,000	73,000	76,000	74,000

Note: Performance varies from flash configurations or host system settings.  
IOPS: measured on 8GB span (16777216 sectors Disk Size), 32 Outstanding I/Os (QD=32), Full Random Data pattern, 4KB Align I/Os and test durations 15minutes

## 1.5 Pin Assignments

**Figure 1-2:** Micro-SATA connectors

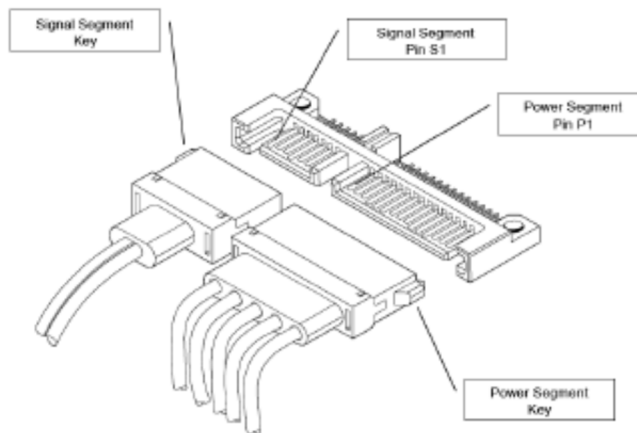

**Table 1-3:** Signal Segment

Pin	Signal	Description
S1		Ground
S2	RxP	Serial Data Receiver
S3	RxN	
S4		Ground
S5	TxN	Serial Data Transmitter
S6	TxP	
S7		Ground

**Table 1-4: Power Segment**

<b>Pin</b>	<b>Signal</b>
<b>P1</b>	<b>Not Used (3.3V)</b>
<b>P2</b>	<b>Not Used (3.3V)</b>
<b>P3</b>	<b>Device Sleep</b>
<b>P4</b>	<b>Ground</b>
<b>P5</b>	<b>Ground</b>
<b>P6</b>	<b>Ground</b>
<b>P7</b>	<b>5V</b>
<b>P8</b>	<b>5V</b>
<b>P9</b>	<b>5V</b>
<b>P10</b>	<b>Ground</b>
<b>P11</b>	<b>DAS</b>
<b>P12</b>	<b>Ground</b>
<b>P13</b>	<b>Not used (12V)</b>
<b>P14</b>	<b>Not Used (12V)</b>
<b>P15</b>	<b>Not Used (12V)</b>

## 2. Software Interface

### 2.1 Command Set

Table 2-1 summarizes the command set with the paragraphs that follow describing the individual commands and the task file for each.

**Table 2-1: Command set**

Command	Code	Command	Code
Check-Power-Mode	E5H	Security-Disable-Password	F6H
Execute-Drive-Diagnostic	90H	Security-Erase-Prepare	F3H
Flush-Cache	E7H	Security-Erase-Unit	F4H
Identify-Drive	ECH	Security-Freeze-Lock	F5H
Idle	E3H	Security-Set-Password	F1H
Idle-Immediate	E1H	Security-Unlock	F2H
Initialize-Drive-Parameters	91H	Seek	7XH
Read DMA	C8H	Set-Features	EFH
Read DMA EXT	25H	Set-Multiple-Mode	C6H
Read FPDMA Queued	60H	Set-Sleep-Mode	E6H
Read Log DMA EXT	47H	SMART	B0H
Read Log EXT	2FH	Stand-By	E2H
Read-Multiple	C4H	Stand-By-Immediate	E0H
Read-Sector	20H or 21H	Write DMA	CAH
Read-Verify-Sectors	40H or 41H	Write DMA EXT	35H
Recalibrate	10H	Write FPDMA Queued	61H
Write Log DMA EXT	57H	Write Log EXT	3FH
Write-Multiple	C5H	Write-Sector	30H or 31H



---

### 3. Flash Management

#### 3.1 Error Correction/Detection

The SATA Flash Drive implements a hardware BCH-based ECC scheme to achieve up to 40 bit correction per 1024-byte page.

#### 3.2 Wear Leveling

All NAND flash devices are limited by a finite number of write cycles. Under a standard file system, frequent file table updates are mandatory. As a painful side effect of OS file overhead, some areas of flash address space wear out faster than others. As these certain sections get a substantially higher write occurrence the whole SATA Flash Drive can wear out very quickly. This uneven wear would significantly reduce the lifetime of the whole device, even if majority of the Flash sectors are far from the write cycle limit. Fortasa's SATA Flash Drive products offer advanced data wear leveling which distributes Flash writes evenly across the SATA Flash Drive memory space. By utilizing this advanced wear leveling feature, the lifetime of the media can be significantly extended.

#### 3.3 Power Failure Management

The Low Power Detection on the Flash controller initiates cached data saving before the power supply to the device drops too low for operation. This feature prevents the device from system crash and ensures data integrity during an unexpected brownout. This feature makes sure that there are no catastrophic failures of the SATA Flash Drive due to system power glitches.

Note: The Flash controller unit of this product model is designed with an External DRAM as a write cache for improved performance and data efficiency. Though unlikely to happen in most cases, the data cached in the volatile DRAM might be potentially affected if a sudden power loss / brown-out condition takes place before the cached data is flushed into non-volatile NAND flash memory.

#### 3.4 ATA Secure Erase

Accomplished by the Secure Erase (SE) command, which added to the open ANSI standards that control disk drives, "ATA Secure Erase" is built into the disk drive itself and thus far less susceptible to malicious software attacks than external software utilities. It is a positive easy-to-use data destroy command, amounting to electronic data shredding. Executing the command causes a drive to internally completely erase all possible user data. This command is carried out within disk drives, so no additional software is required. The erase process will not stop until it is completed. In case of power failure, the erase process will continue when the power is reapplied to the device.

### 3.5 S.M.A.R.T. Technology

S.M.A.R.T. is an acronym for Self-Monitoring, Analysis and Reporting Technology, an open standard allowing disk drives to automatically monitor their own health and report potential problems. It protects the user from unscheduled downtime by monitoring and storing critical drive performance and calibration parameters. Ideally, this should allow taking proactive actions to prevent impending drive failure.

Code	SMART Subcommand
D0h	READ DATA
D1h	READ ATTRIBUTE THRESHOLDS
D2h	Enable/Disable Attribute Autosave
D4h	Execute Off-line Immediate
D5h	Read Log (optional)
D6h	Write Log (optional)
D8h	Enable Operations
D9h	Disable operations
DAh	Return Status

#### General SMART attribute structure

Byte	Description
0	ID (Hex)
1 – 2	Status flag
3	Value
4	Worst
5*-11	Raw Data

\*Byte 5: LSB

#### SMART attribute ID list

ID (Hex)	Attribute Name
9 (0x09)	Power-on hours
12 (0x0C)	Power cycle count
163 (0xA3)	Maximum Erase Count
164 (0xA4)	Average Erase Count
166 (0xA6)	Total Later Block Count
167 (0xA7)	SSD Protect Mode (vendor specific)
168 (0xA8)	SATA PHY Error Count
175 (0xAF)	Bad Cluster Table Count
192 (0xC0)	Unexpected Power Loss Count
194 (0xC2)	Temperature
241 (0xF1)	Total sectors of write

### 3.6 TRIM Command Support

Over time the performance of SSD degrades as user continually writes and erases data. The ATA-TRIM command “formats” the SSD to optimize the drive performance. A TRIM enabled SSD running an OS with TRIM support will stay closer to its peak performance without much performance variance.

## 4. Environmental Specifications

### 4.1 Environments

Environmental specification of the SATA Flash Drive series follows the MIL-STD-810F standard as shown in Table 4-1.

**Table 4-1:** Environmental specifications

Environment		Specification
Temperature	Operation	0°C to 70°C (standard); -40°C to 85°C (industrial)
	Storage	-40°C to 100°C
Vibration		Sine wave: 5~55~5 Hz (X, Y, Z) Random: 10-2000 Hz, 16.3 G (X, Y, Z)
Shock-Operating		Acceleration: 1,500 G, 0.5 ms Peak acceleration: 50 G, 11 ms
Altitude		80,000 ft

### 4.2 Mean Time Between Failures (MTBF)

Mean Time Between Failures (MTBF) is predicted based on reliability data for the individual components in the SFD drive. Based on provided component data, SATA Flash Drive is rated at more than 2,000,000 hours.

Notes about the MTBF:

The MTBF is predicated and calculated based on “Telcordia Technologies Special Report, SR-332, Issue 2” method.

### 4.3 Certification and Compliance

The SFD25D complies with the following standards:

- CE
- FCC
- RoHS
- MIL-STD-810F

#### 4.4 Endurance

The endurance of a storage device is predicted by TeraBytes Written based on several factors related to usage, such as the amount of data written into the drive, block management conditions, and daily workload for the drive. Thus, key factors, such as Write Amplifications and the number of P/E cycles, can influence the lifespan of the drive.

Capacity	TeraBytesWritten (TBW)
8 GB	339
16 GB	612
32 GB	1,348
64 GB	2,819
128 GB	6,000
240 GB	12,122

Notes:

The measurement assumes the data written to the SSD for test is under a typical and constant rate.  
 The measurement follows the standard metric: 1 TB (Terabyte) = 1000 GB

## 5. Electrical Specification

### 5.1 Operating Voltage

**Caution: Absolute Maximum Stress Ratings** – Applied conditions greater than those listed under “Absolute Maximum Stress Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.

**Table 5-1:** Operating range

Range	Ambient Temperature	Conditions
Commercial	0°C to +70°C	5.0 V ±10% ( 4.5-5.5 V )
Industrial	-40°C to 85°C	5.0 V ±10% ( 4.5-5.5 V )

### 5.2 Power Consumption

Table 5-2 lists the SFD 25B power consumption.

**Table 5-2** Typical power consumption (Standard Speed)

Capacity	8GB	16GB	32GB	64GB	128GB	240GB
<b>Active Mode (mA)</b>	275	190	305	440	470	475
<b>Idle Mode (mA)</b>	70	75	75	70	70	75


**6. Physical Characteristics**

**6.1 7.0 mm Dimensions**

Figure 6-1 illustrates the overall dimensions of the 7.0mm Housing Thickness drive, as listed in Table 6-1.

**Table 6-1 SFD dimensions**

Dimension	Millimeters (mm)
Height	6.90 ± 0.20
Width	69.85 ± 0.20
Length	100.00 ± 0.20

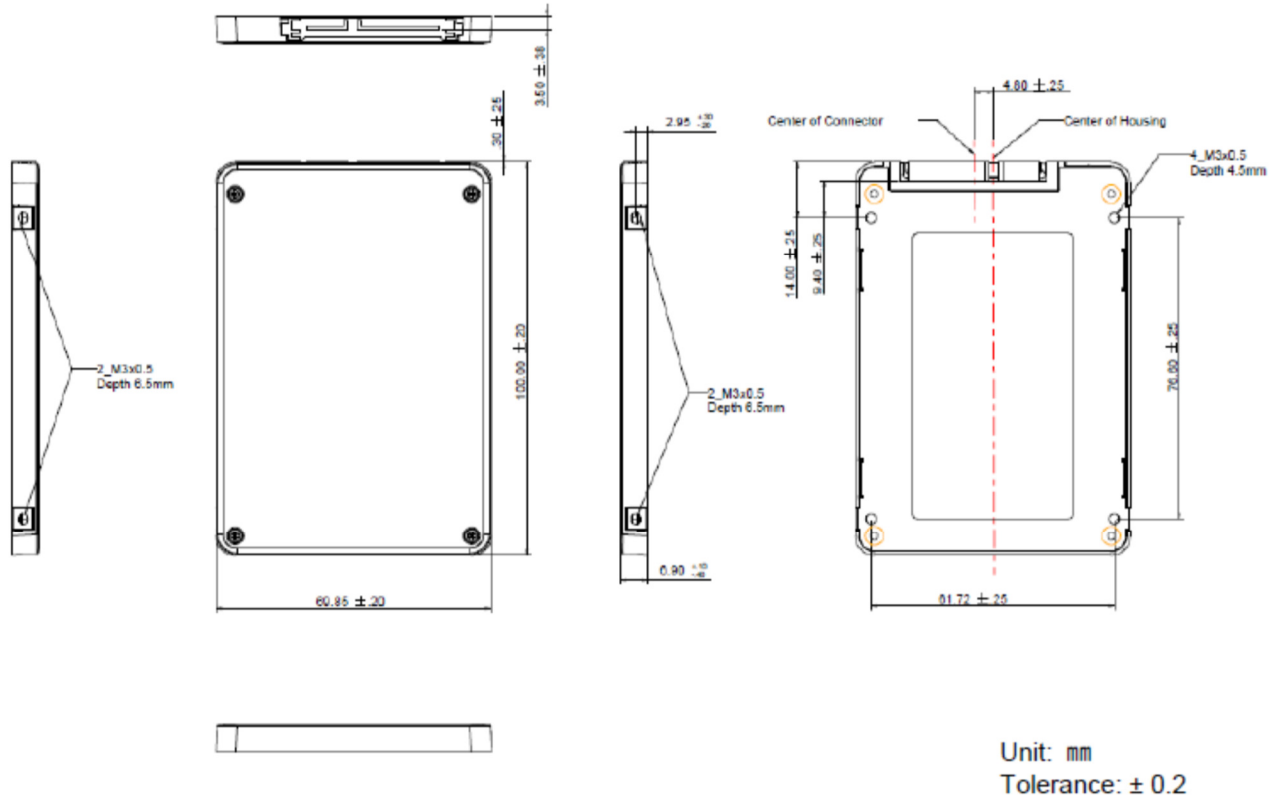

**Figure 6-1**

# SATA Flash Drive – 2.5” FMS-SFD25DXxxxG-XAT




## 6.2 9.5 mm Dimensions

Figure 6-2 illustrates the overall dimensions of the 9.5mm Housing Thickness drive, as listed in Table 6-2.

**Table 6-2 SFD dimensions**


Dimension	Millimeters (mm)
Height	9.30 ± 0.20
Width	69.84 ± 0.20
Length	100.00 ± 0.20

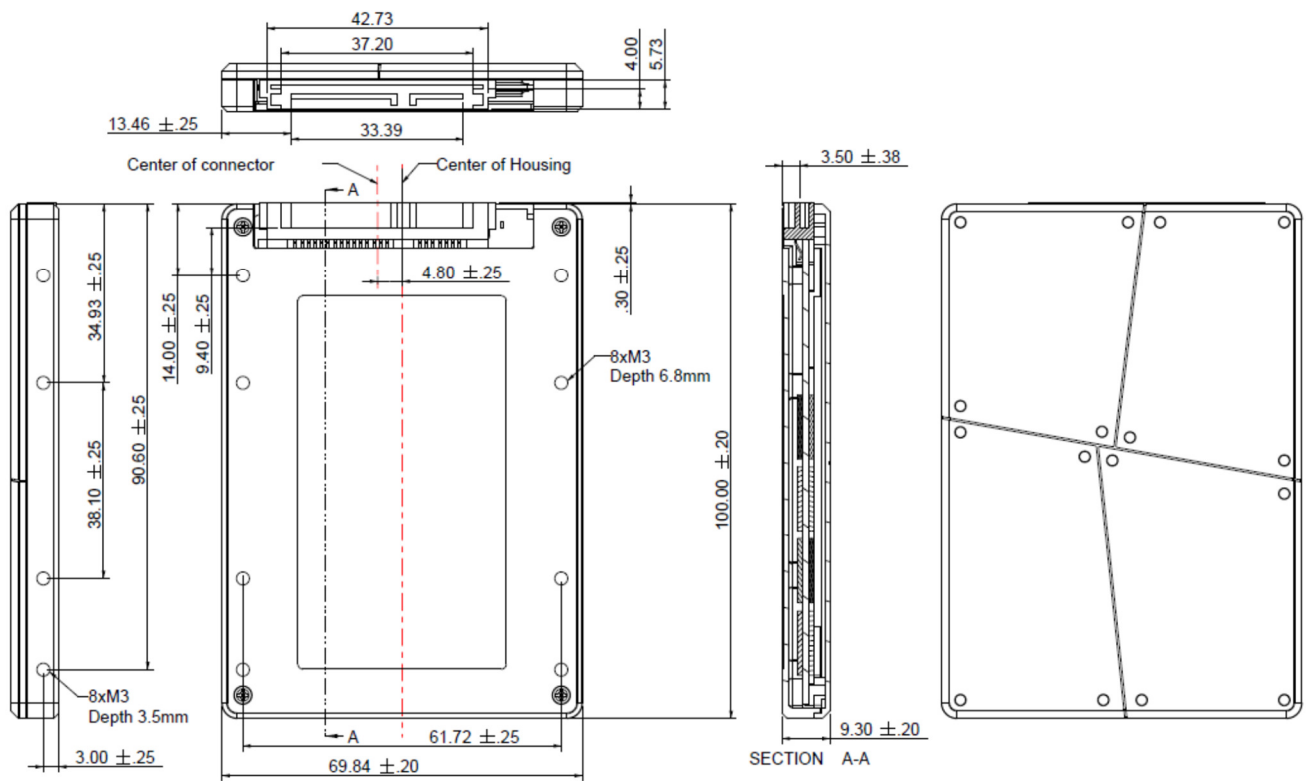

**Figure 6-2**

**7. Product Ordering Information**

**7.1 Product Code Designations**

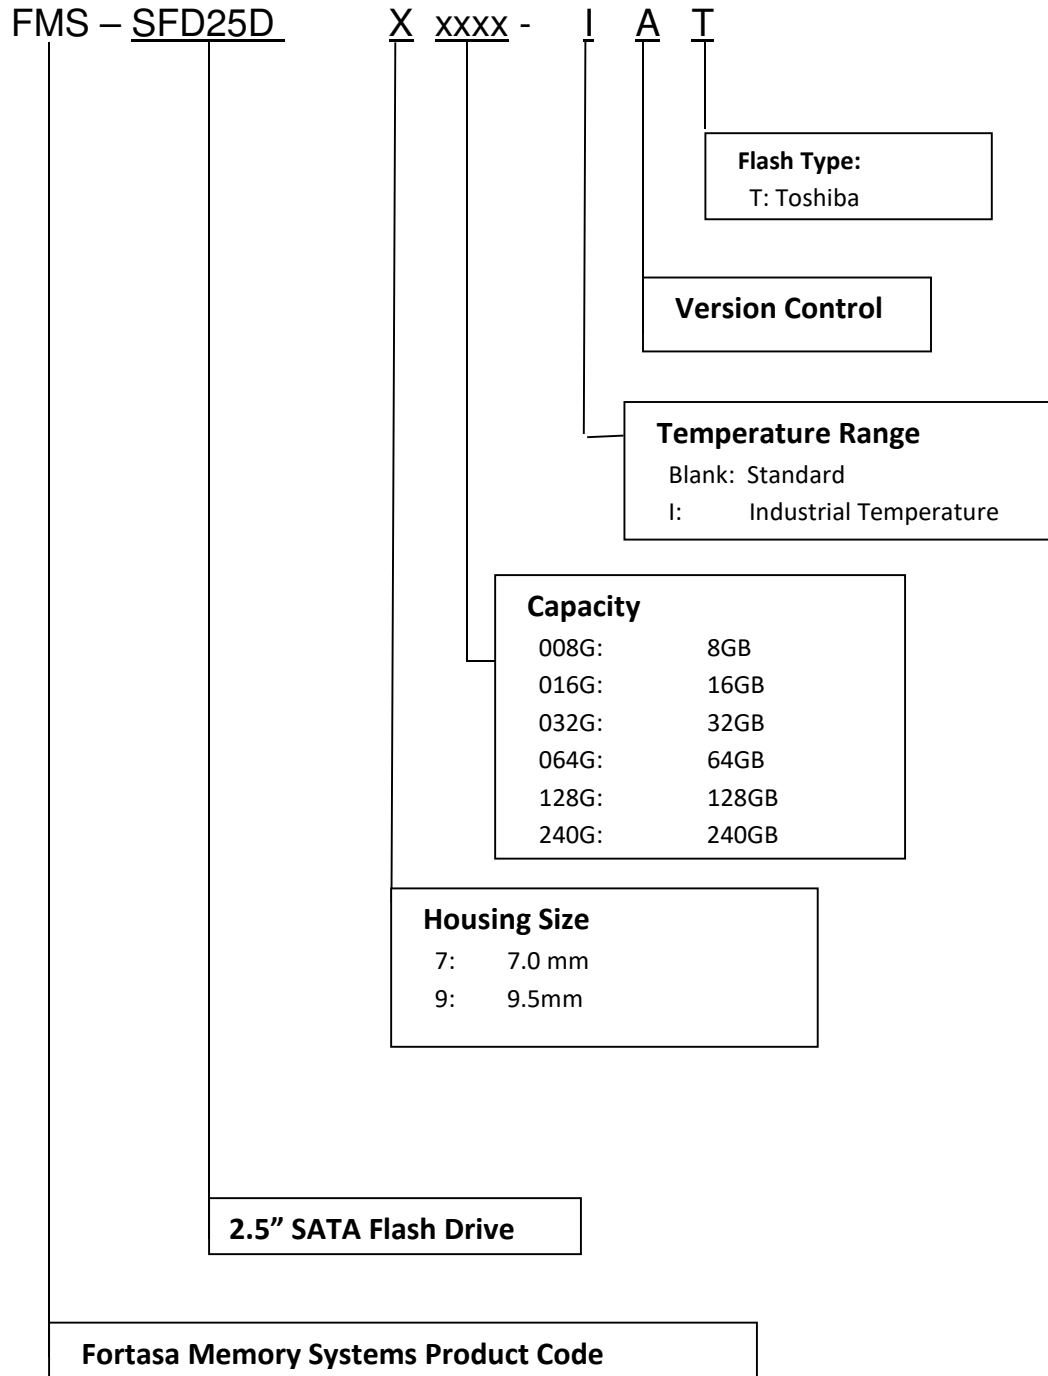

## 7.2 Valid Combinations

### 7.2.1 7.0mm Housing

Capacity	Standard Temperature Model Numbers	Industrial Temperature Model Numbers
8GB	FMS-SFD25D7008G-AT	FMS-SFD25D7008G-IAT
16GB	FMS-SFD25D7016G-AT	FMS-SFD25D7016G-IAT
32GB	FMS-SFD25D7032G-AT	FMS-SFD25D7032G-IAT
64GB	FMS-SFD25D7064G-AT	FMS-SFD25D7064G-IAT
128GB	FMS-SFD25D7128G-AT	FMS-SFD25D7128G-IAT
240GB	FMS-SFD25D7240G-AT	FMS-SFD25D7240G-IAT

### 7.2.2 9.50mm Housing

Capacity	Standard Temperature Model Numbers	Industrial Temperature Model Numbers
8GB	FMS-SFD25D9008G-AT	FMS-SFD25D9008G-IAT
16GB	FMS-SFD25D9016G-AT	FMS-SFD25D9016G-IAT
32GB	FMS-SFD25D9032G-AT	FMS-SFD25D9032G-IAT
64GB	FMS-SFD25D9064G-AT	FMS-SFD25D9064G-IAT
128GB	FMS-SFD25D9128G-AT	FMS-SFD25D9128G-IAT
240GB	FMS-SFD25D9240G-AT	FMS-SFD25D9240G-IAT

### 7.2.3 Additional Features (Optional)

As part Value Added Services, Fortasa products can also integrate the following:

- G – Ground Separation from the metal housing
- C – Conformal Coating using Humiseal 1B73 clear urethane aerosol
- GC – Ground Separation and Conformal Coating

**Note:** Valid combinations are those products in mass production or will be in mass production. Consult your Fortasa sales representative to confirm availability of valid combinations and to determine availability of new product combinations





---

## 8. Revision History

Revision	Date	Description	Comments
1.0	11/15/2019	Initial Release	
1.1	1/3/2020	Added 240GB part number	