

***RoHS Compliant***

**SATA Flash Drive Series**

***Datasheet for SFD 25E – 2.5” SLC NAND Based Industrial  
SSD***

**August 26, 2025**

**Revision 1.0**

***This Specification Describes the Features and  
Capabilities of the Standard and Industrial  
Temperature  
SATA Flash Drives***

***Please Contact Fortasa Memory Systems Sales for  
any Custom Features Required For Your Specific  
Application***



1670 So. Amphlett Blvd  
Suite 214-33  
San Mateo, CA 94402 USA  
**888-367-8588**  
[www.fortasa.com](http://www.fortasa.com)

# SATA Flash Drive – 2.5”

## FMS-SFD25E7xxxG-XAKS



### Features:

- **Standard Serial SATA 3.2**
  - SATA 3.1 command set compatible
  - Serial SATA 6.0 Gbps Interface
  - Backward compatible with SATA 1.5 and 3.0 Gbps interfaces
  - ATA-8 compatible command set
- **Low power consumption (typical)**
  - Supply voltage: 5V±5%
  - Active mode: 475 mA
  - Idle mode: 75 mA
- **Capacity**
  - 8, 16, 32, 64, 128GB
- **NAND flash type: SLC**
- **MTBF (hours):** >3,000,000
- **Connector Type**
  - 7-pin signal connector
  - 15-pin power connector
- **Performance**
  - Burst transfer rate: 600 MB/sec
  - Sustained read: up to 510 MB/sec
  - Sustained write: up to 420 MB/sec
  - Random read (4K): up to 80,000 IOPS
  - Random write (4K): up to 70,000 IOPS
- **Form factor**
  - 2.5 inch
    - 7.0mm    - 100.00 x 69.85 x 6.90, unit: mm
- **RoHS compliant**
- **Shock and Vibration**
  - Shock: 1500g (approx.)
  - Vibration: 15g (approx.)
- **Thermal Sensor for Temperature Management**
- **Intelligent endurance design**
  - Built-in hardware ECC, Low-Density Parity-Check (LDPC) Code
  - Global wear-leveling scheme together with dynamical block allocation to significantly increase the lifetime of a flash device and optimize the disk performance
  - Flash bad-block management
  - *Power Failure Management*
  - *ATA Secure Erase*
  - *SMART Command*
  - *Trim Command*
- **Temperature ranges**
  - Operation:
    - Standard: 0°C to 70°C (32° ~ 158°F)
    - Industrial: -40°C to 85°C (-40° ~ 185°F)
  - Storage: -40°C to 100°C (-40° ~ 212°F)
- **Endurance in Terabytes Written (TBW)**
  - 8 GB: 308 TBW
  - 16 GB: 578 TBW
  - 32 GB: 1,217 TBW
  - 64 GB: 2,314 TBW
  - 128 GB: 5,281 TBW

---

### Table of Contents

|   |    |
|---|----|
| 1 Product Description .....                 | 4  |
| 1.1 General Description.....                | 4  |
| 1.2 Functional Block .....                  | 4  |
| 1.3 Capacity Specification.....             | 4  |
| 1.4 Performance Specification .....         | 5  |
| 1.5 Pin Assignments.....                    | 5  |
| 2. Software Interface .....                 | 7  |
| 2.1 Command Set.....                        | 7  |
| 3. Flash Management .....                   | 8  |
| 3.1 Error Correction/Detection.....         | 8  |
| 3.2 Wear Leveling .....                     | 8  |
| 3.3 Power Failure Management.....           | 8  |
| 3.4 ATA Secure Erase.....                   | 8  |
| 3.5 S.M.A.R.T. Technology .....             | 9  |
| 3.6 TRIM Command Support.....               | 10 |
| 4. Environmental Specifications .....       | 10 |
| 4.1 Environments .....                      | 10 |
| 4.2 Mean Time Between Failures (MTBF) ..... | 10 |
| 4.3 Certification and Compliance.....       | 10 |
| 4.4 Endurance.....                          | 11 |
| 5. Electrical Specification .....           | 11 |
| 5.1 Operating Voltage .....                 | 11 |
| 5.2 Power Consumption .....                 | 11 |
| 6. Physical Characteristics .....           | 12 |
| 6.1 7.0 mm Dimensions.....                  | 12 |
| 6.2 9.5 mm Dimensions.....                  | 13 |
| 7. Product Ordering Information.....        | 14 |
| 7.1 Product Code Designations .....         | 14 |
| 7.2 Valid Combinations.....                 | 15 |
| 7.2.1 7.0mm Housing .....                   | 15 |
| 7.2.2 Additional Features (Optional).....   | 15 |
| 8. Revision History .....                   | 16 |

## 1 Product Description

### 1.1 General Description

Fortasa’s SFD25E is a high-performance, SATA interface, solid state drive (SSD) designed to replace a conventional SATA hard disk drive. SFD supports standard SATA protocol and can be plugged into a standard SATA connector commonly found in rugged laptops, military devices, thin clients, Point of Sale (POS) terminals, telecom, medical instruments, surveillance systems and industrial PCs. Fortasa SFD Series is the best drop-in replacement for high-maintenance HDD where reliability is of a major importance.

The SFD25E drive offers capacities of up to 240 gigabytes, providing full support for the SATA 6GBps high-speed interface standard. It can operate at sustained access rates of up to 520 megabytes per second, which is much faster than other solid-state or traditional HDD SATA drives currently available on the market.

SFD25E offers high reliability global data wear-leveling scheme to allow uniform use of all storage blocks, increasing the lifetime of Flash media and optimizing drive performance. The SFD25E also offers Self-Monitoring Analysis and Reporting Technology (S.M.A.R.T.) feature that follows the ATA/ATAPI specifications and uses the standard SMART command B0h to read data from the drive. This capability monitors the drive accesses and provides the host with vital information about drive condition to schedule maintenance and service times.

### 1.2 Functional Block

The SFD25E drive includes a SATA 6.0 Gps Flash Controller and flash media. The Flash controller integrates the flash management unit to support multi-channel, multi-bank flash arrays.

### 1.3 Capacity Specification

Standard capacity specification of the SATA Flash Drive product is shown in Table 1-1. The table lists the specific capacity and the default numbers of heads, sectors and cylinders (CHS) for each product line.

**Table 1-1: Capacity specifications**

| Capacity     | Total Bytes            | Cylinders                | Heads     | Sectors   | Max LBA            |
|--------------|------------------------|--------------------------|-----------|-----------|--------------------|
| <b>8GB</b>   | <b>8,012,390,400</b>   | <b>15525<sup>1</sup></b> | <b>16</b> | <b>63</b> | <b>15,649,200</b>  |
| <b>16GB</b>  | <b>16,013,942,784</b>  | <b>16383<sup>1</sup></b> | <b>16</b> | <b>63</b> | <b>31,277,232</b>  |
| <b>32GB</b>  | <b>32,017,047,552</b>  | <b>16383<sup>1</sup></b> | <b>16</b> | <b>63</b> | <b>62,533,296</b>  |
| <b>64GB</b>  | <b>64,023,257,088</b>  | <b>16383<sup>1</sup></b> | <b>16</b> | <b>63</b> | <b>125,045,424</b> |
| <b>128GB</b> | <b>128,035,676,160</b> | <b>16383<sup>1</sup></b> | <b>16</b> | <b>63</b> | <b>250,069,680</b> |

1. Cylinders, heads or sectors are not applicable for these capacities. Only LBA addressing applies.

*Please contact factory for any non-listed SATA Flash Drive capacity or custom CHS requirement.*

# SATA Flash Drive – 2.5” FMS-SFD25E7xxxG-XAKS



## 1.4 Performance Specification

Performances of the SATA Flash Drive are listed in Table 1-2.


**Table 1-2:** High Performance specifications

| Performance \ Capacity        | 8GB    | 16GB   | 32GB   | 64GB   | 128GB  |
|-------------------------------|--------|--------|--------|--------|--------|
| <b>Sustained read (MB/s)</b>  | 310    | 510    | 510    | 510    | 510    |
| <b>Sustained write (MB/s)</b> | 70     | 150    | 310    | 310    | 420    |
| <b>Random Read IOPS (4K)</b>  | 38,000 | 65,000 | 80,000 | 80,000 | 80,000 |
| <b>Random Write IOPS (4K)</b> | 17,000 | 35,000 | 65,000 | 65,000 | 70,000 |

Note: Performance varies from flash configurations or host system settings.  
IOPS: measured on 8GB span (16777216 sectors Disk Size), 32 Outstanding I/Os (QD=32), Full Random Data pattern, 4KB Align I/Os and test durations 15minutes

## 1.5 Pin Assignments

**Figure 1-2:** Micro-SATA connectors

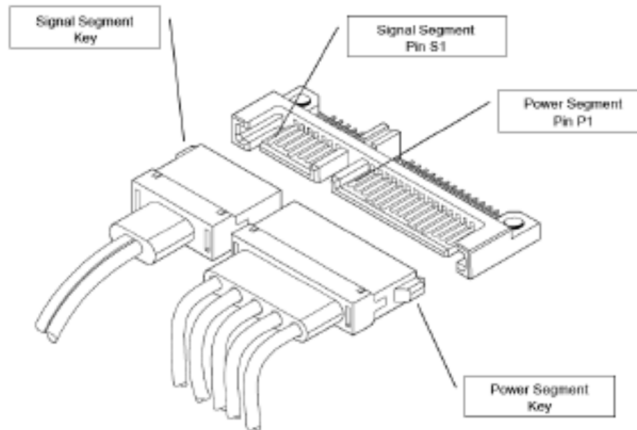

**Table 1-3:** Signal Segment

| Pin | Signal | Description             |
|-----|--------|-------------------------|
| S1  |        | Ground                  |
| S2  | RxP    | Serial Data Receiver    |
| S3  | RxN    |                         |
| S4  |        | Ground                  |
| S5  | TxN    | Serial Data Transmitter |
| S6  | TxP    |                         |
| S7  |        | Ground                  |

**Table 1-4: Power Segment**

| <b>Pin</b> | <b>Signal</b>          |
|------------|------------------------|
| <b>P1</b>  | <b>Not Used (3.3V)</b> |
| <b>P2</b>  | <b>Not Used (3.3V)</b> |
| <b>P3</b>  | <b>Device Sleep</b>    |
| <b>P4</b>  | <b>Ground</b>          |
| <b>P5</b>  | <b>Ground</b>          |
| <b>P6</b>  | <b>Ground</b>          |
| <b>P7</b>  | <b>5V</b>              |
| <b>P8</b>  | <b>5V</b>              |
| <b>P9</b>  | <b>5V</b>              |
| <b>P10</b> | <b>Ground</b>          |
| <b>P11</b> | <b>DAS</b>             |
| <b>P12</b> | <b>Ground</b>          |
| <b>P13</b> | <b>Not used (12V)</b>  |
| <b>P14</b> | <b>Not Used (12V)</b>  |
| <b>P15</b> | <b>Not Used (12V)</b>  |

## 2. Software Interface

### 2.1 Command Set

Table 2-1 summarizes the command set with the paragraphs that follow describing the individual commands and the task file for each.

**Table 2-1:** Command set

| Command                     | Code       | Command                   | Code       |
|-----------------------------|------------|---------------------------|------------|
| Check-Power-Mode            | E5H        | Security-Disable-Password | F6H        |
| Execute-Drive-Diagnostic    | 90H        | Security-Erase-Prepare    | F3H        |
| Flush-Cache                 | E7H        | Security-Erase-Unit       | F4H        |
| Identify-Drive              | ECH        | Security-Freeze-Lock      | F5H        |
| Idle                        | E3H        | Security-Set-Password     | F1H        |
| Idle-Immediate              | E1H        | Security-Unlock           | F2H        |
| Initialize-Drive-Parameters | 91H        | Seek                      | 7XH        |
| Read DMA                    | C8H        | Set-Features              | EFH        |
| Read DMA EXT                | 25H        | Set-Multiple-Mode         | C6H        |
| Read FPDMA Queued           | 60H        | Set-Sleep-Mode            | E6H        |
| Read Log DMA EXT            | 47H        | SMART                     | B0H        |
| Read Log EXT                | 2FH        | Stand-By                  | E2H        |
| Read-Multiple               | C4H        | Stand-By-Immediate        | E0H        |
| Read-Sector                 | 20H or 21H | Write DMA                 | CAH        |
| Read-Verify-Sectors         | 40H or 41H | Write DMA EXT             | 35H        |
| Recalibrate                 | 10H        | Write FPDMA Queued        | 61H        |
| Write Log DMA EXT           | 57H        | Write Log EXT             | 3FH        |
| Write-Multiple              | C5H        | Write-Sector              | 30H or 31H |

---

### 3. Flash Management

#### 3.1 Error Correction/Detection

The SATA Flash Drive SFD25E product family implements a hardware ECC scheme, based on the Low Density Parity Check (LDPC). LDPC is a class of linear block error correcting code which has a substantial coding gain over the conventional BCH error correction code because LDPC code includes both hard decoding and soft decoding algorithms. Offering a reduced bit error rate, LDPC can extend SSD endurance and increase data reliability.

#### 3.2 Wear Leveling

All NAND flash devices are limited by a finite number of write cycles. Under a standard file system, frequent file table updates are mandatory. As a painful side effect of OS file overhead, some areas of flash address space wear out faster than others. As these certain sections get a substantially higher write occurrence the whole SATA Flash Drive can wear out very quickly. This uneven wear would significantly reduce the lifetime of the whole device, even if majority of the Flash sectors are far from the write cycle limit. Fortasa’s SATA Flash Drive products offer advanced data wear leveling which distributes Flash writes evenly across the SATA Flash Drive memory space. By utilizing this advanced wear leveling feature, the lifetime of the media can be significantly extended.

#### 3.3 Power Failure Management

The Low Power Detection on the Flash controller initiates cached data saving before the power supply to the device drops too low for operation. This feature prevents the device from system crash and ensures data integrity during an unexpected brownout. This feature makes sure that there are no catastrophic failures of the SATA Flash Drive due to system power glitches.

Note: The Flash controller unit of this product model is designed with an External DRAM as a write cache for improved performance and data efficiency. Though unlikely to happen in most cases, the data cached in the volatile DRAM might be potentially affected if a sudden power loss / brown-out condition takes place before the cached data is flushed into non-volatile NAND flash memory.

#### 3.4 ATA Secure Erase

Accomplished by the Secure Erase (SE) command, which added to the open ANSI standards that control disk drives, “ATA Secure Erase” is built into the disk drive itself and thus far less susceptible to malicious software attacks than external software utilities. It is a positive easy-to-use data destroy command, amounting to electronic data shredding. Executing the command causes a drive to internally completely erase all possible user data. This command is carried out within disk drives, so no additional software is required. The erase process will not stop until it is completed. In case of power failure, the erase process will continue when the power is reapplied to the device.

### 3.5 S.M.A.R.T. Technology

S.M.A.R.T. is an acronym for Self-Monitoring, Analysis and Reporting Technology, an open standard allowing disk drives to automatically monitor their own health and report potential problems. It protects the user from unscheduled downtime by monitoring and storing critical drive performance and calibration parameters. Ideally, this should allow taking proactive actions to prevent impending drive failure.

| Code | SMART Subcommand                  |
|------|-----------------------------------|
| D0h  | READ DATA                         |
| D1h  | READ ATTRIBUTE THRESHOLDS         |
| D2h  | Enable/Disable Attribute Autosave |
| D4h  | Execute Off-line Immediate        |
| D5h  | Read Log (optional)               |
| D6h  | Write Log (optional)              |
| D8h  | Enable Operations                 |
| D9h  | Disable operations                |
| DAh  | Return Status                     |

#### General SMART attribute structure

| Byte  | Description |
|-------|-------------|
| 0     | ID (Hex)    |
| 1 – 2 | Status flag |
| 3     | Value       |
| 4     | Worst       |
| 5*-11 | Raw Data    |

\*Byte 5: LSB

#### SMART attribute ID list

| ID (Hex)   | Attribute Name                     |
|------------|------------------------------------|
| 9 (0x09)   | Power-on hours                     |
| 12 (0x0C)  | Power cycle count                  |
| 163 (0xA3) | Maximum Erase Count                |
| 164 (0xA4) | Average Erase Count                |
| 166 (0xA6) | Total Later Block Count            |
| 167 (0xA7) | SSD Protect Mode (vendor specific) |
| 168 (0xA8) | SATA PHY Error Count               |
| 171 (0xAB) | Program Fail Count                 |
| 172 (0xAC) | Erase Fail Count                   |
| 175 (0xAF) | Bad Cluster Table Count            |
| 192 (0xC0) | Unexpected Power Loss Count        |
| 194 (0xC2) | Temperature                        |
| 231 (0xE7) | Lifetime Left                      |
| 241 (0xF1) | Total sectors of write             |

### 3.6 TRIM Command Support

Over time the performance of SSD degrades as user continually writes and erases data. The ATA-TRIM command “formats” the SSD to optimize the drive performance. A TRIM enabled SSD running an OS with TRIM support will stay closer to its peak performance without much performance variance.

## 4. Environmental Specifications

### 4.1 Environments

Environmental specification of the SATA Flash Drive series follows the MIL-STD-810F standard as shown in Table 4-1.

**Table 4-1:** Environmental specifications

| Environment             |                    | Specification   |
|-------------------------|--------------------|---|
| Temperature             | Operating (Tc)     | 0°C to 70°C (Standard); -40°C to 85°C (Industrial)                    |
|                         | Non-Operating (Ta) | -40°C to 100°C  |
| Operating Vibration     |                    | 7.69 GRMS, 20~2000 Hz/random (compliant with MIL-STD-810G)            |
| Non-Operating Vibration |                    | 4.02 GRMS, 15~2000 Hz/random (compliant with MIL-STD-810G)            |
| Operating Shock         |                    | Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G)    |
| Non-Operating Shock     |                    | Acceleration, 1500(G)/0.5(ms)/half sine (compliant with MIL-STD-883K) |

### 4.2 Mean Time Between Failures (MTBF)

Mean Time Between Failures (MTBF) is predicted based on reliability data for the individual components in the SFD drive. Based on provided component data, SATA Flash Drive is rated at more than 3,000,000 hours.

Notes about the MTBF:

The MTBF is predicated and calculated based on “Telcordia Technologies Special Report, SR-332, Issue 2” method.

### 4.3 Certification and Compliance

The SFD25E complies with the following standards:

- CE
- FCC
- RoHS Recast
- MIL-STD-810F

## 4.4 Endurance

The endurance of a storage device is predicted by TeraBytes Written based on several factors related to usage, such as the amount of data written into the drive, block management conditions, and daily workload for the drive. Thus, key factors, such as Write Amplifications and the number of P/E cycles, can influence the lifespan of the drive.

| Capacity | TeraBytesWritten (TBW) |
|----------|------------------------|
| 8 GB     | 308                    |
| 16 GB    | 578                    |
| 32 GB    | 1,217                  |
| 64 GB    | 2,314                  |
| 128 GB   | 5,281                  |

Notes:

- This estimation complies with JEDEC random client workload.
- Flash vendor guaranteed SLC P/E cycles: 60K
- WAF may vary from capacity, flash configurations and writing behavior on each platform.
- 1 Terabyte = 1,024GB

## 5. Electrical Specification

### 5.1 Operating Voltage

**Caution: Absolute Maximum Stress Ratings** – Applied conditions greater than those listed under “Absolute Maximum Stress Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.

**Table 5-1: Operating range**

| Range      | Ambient Temperature | Conditions               |
|------------|---------------------|--------------------------|
| Commercial | 0°C to +70°C        | 5.0 V ±10% ( 4.5-5.5 V ) |
| Industrial | -40°C to 85°C       | 5.0 V ±10% ( 4.5-5.5 V ) |

### 5.2 Power Consumption

Table 5-2 lists the SFD 25E power consumption.

**Table 5-2 Power consumption**

| Capacity                      | 8GB | 16GB | 32GB | 64GB | 128GB |
|-------------------------------|-----|------|------|------|-------|
| <b>Performance</b>            |     |      |      |      |       |
| <b>Active Mode (Max) (mA)</b> | 250 | 330  | 360  | 410  | 480   |
| <b>Idle Mode (Typ) (mA)</b>   | 70  | 70   | 70   | 70   | 70    |

Notes:

- All values are typical and may vary depending on flash configurations or host system settings.
- Power consumption is measured using CrystalDiskMark 8.0.4 with file size 1,000MB.


**6. Physical Characteristics**

**6.1 7.0 mm Dimensions**

Figure 6-1 illustrates the overall dimensions of the 7.0mm Housing Thickness drive, as listed in Table 6-1.

**Table 6-1** SFD dimensions

| Dimension | Millimeters (mm) |
|-----------|------------------|
| Height    | 6.90 ± 0.20      |
| Width     | 69.85 ± 0.20     |
| Length    | 100.00 ± 0.20    |

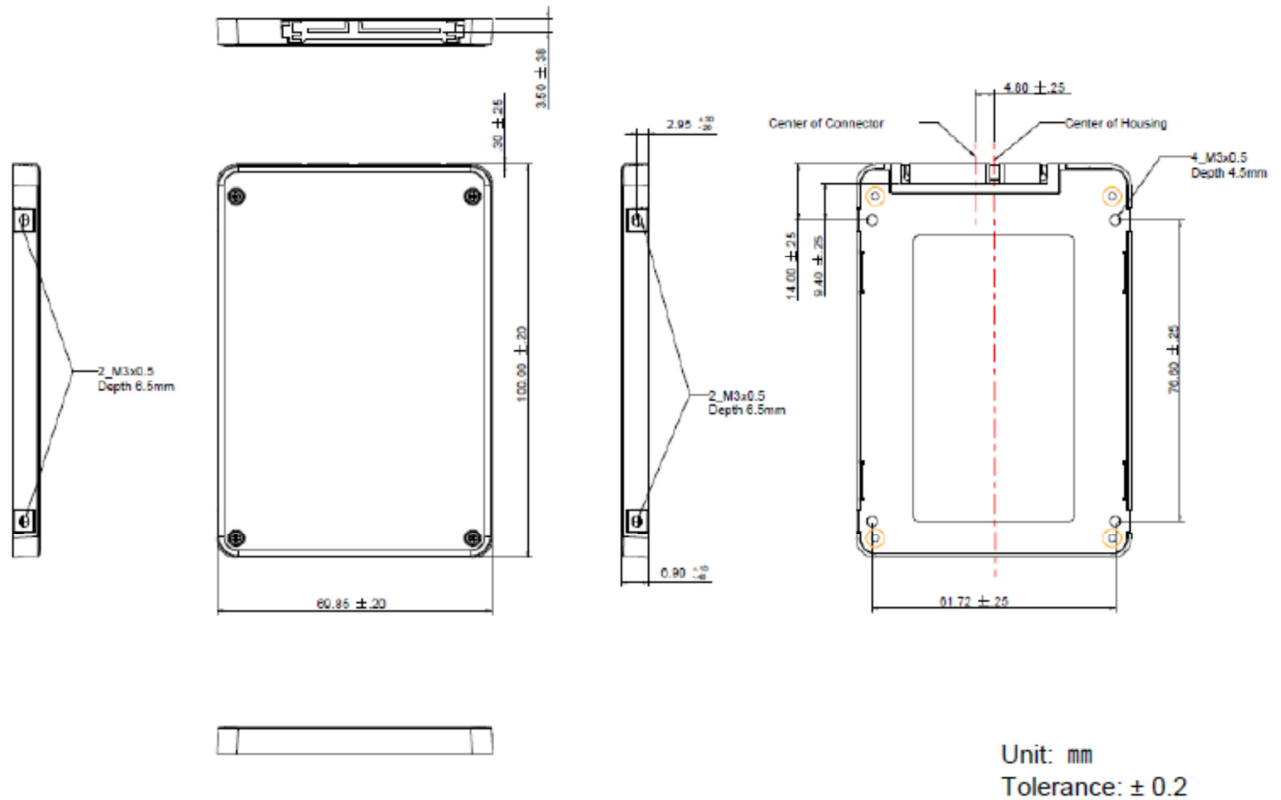

**Figure 6-1**

# SATA Flash Drive – 2.5” FMS-SFD25E7xxxG-XAKS




## 6.2 9.5 mm Dimensions

Figure 6-2 illustrates the overall dimensions of the 7 mm Housing Thickness drive, as listed in Table 6-2.

**Table 6-2** SFD dimensions


| Dimension | Millimeters (mm)    |
|-----------|---------------------|
| Height    | 7.00 ± 0.20         |
| Width     | 69.85 ± 0.15        |
| Length    | 100.00 + 0.35/-0.15 |

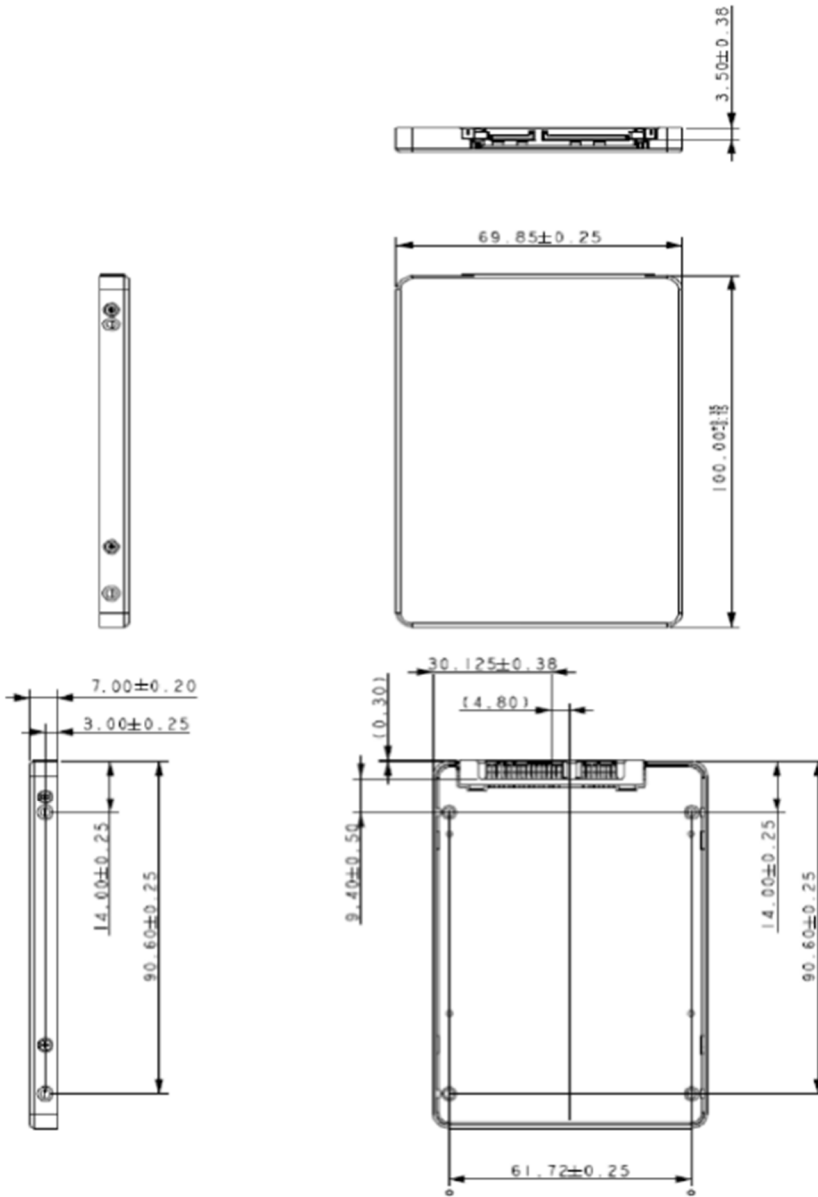

**Figure 6-2**

## 7. Product Ordering Information

### 7.1 Product Code Designations

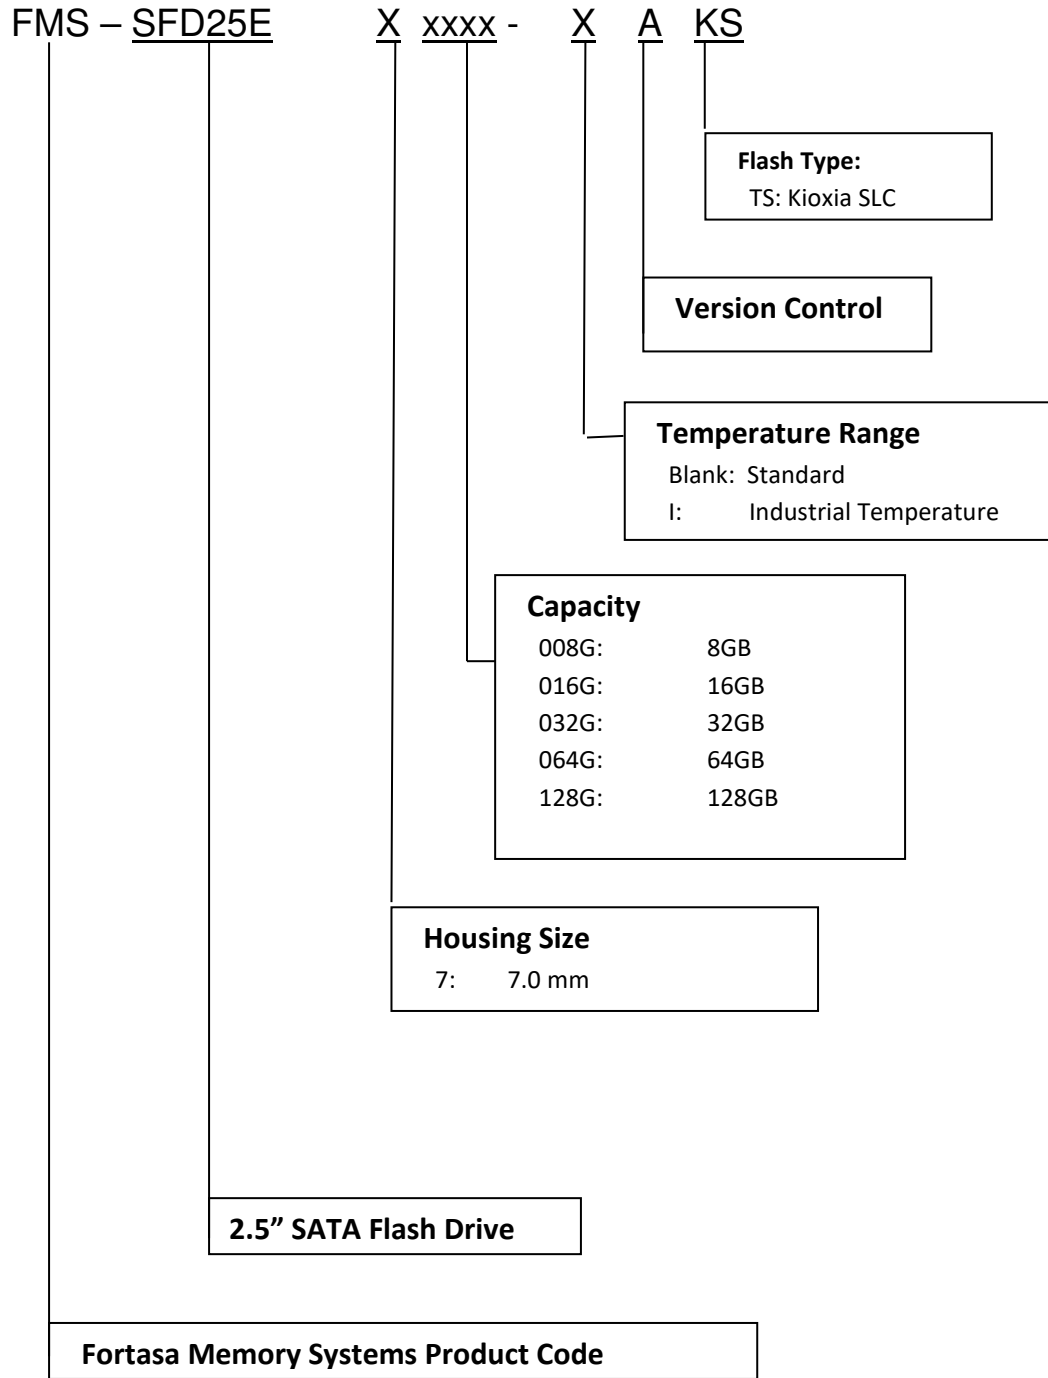

## 7.2 Valid Combinations

### 7.2.1 7.0mm Housing

| Capacity | Standard Temperature Model Numbers | Industrial Temperature Model Numbers |
|----------|------------------------------------|--------------------------------------|
| 8GB      | FMS-SFD25E7008G-AKS                | FMS-SFD25E7008G-IAKS                 |
| 16GB     | FMS-SFD25E7016G-AKS                | FMS-SFD25E7016G-IAKS                 |
| 32GB     | FMS-SFD25E7032G-AKS                | FMS-SFD25E7032G-IAKS                 |
| 64GB     | FMS-SFD25E7064G-AKS                | FMS-SFD25E7064G-IAKS                 |
| 128GB    | FMS-SFD25E7128G-AKS                | FMS-SFD25E7128G-IAKS                 |

### 7.2.2 Additional Features (Optional)

As part Value Added Services, Fortasa products can also integrate the following:

- G** – Ground Separation from the metal housing
- C** – Conformal Coating using Humiseal 1B73 clear urethane aerosol
- GC** – Ground Separation and Conformal Coating

**Note:** Valid combinations are those products in mass production or will be in mass production. Consult your Fortasa sales representative to confirm availability of valid combinations and to determine availability of new product combinations



---

## 8. Revision History

| Revision | Date      | Description     | Comments |
|----------|-----------|-----------------|----------|
| 1.0      | 8/26/2025 | Initial Release |          |

Copyright © 2025 Fortasa Memory Systems, Inc. All Rights Reserved.

Information in this document is subject to change without prior notice.

Fortasa name and the Fortasa logo are trademarks or registered trademarks of  
Fortasa Memory Systems, Inc.

Other brands, names, trademarks or registered trademarks may be claimed as the property of  
their respective owners.